



Hydraulic Performance Curves

LPP40	Rated speed: 2900r/min	Max. working pressure: 16bar
--------------	-------------------------------	-------------------------------------

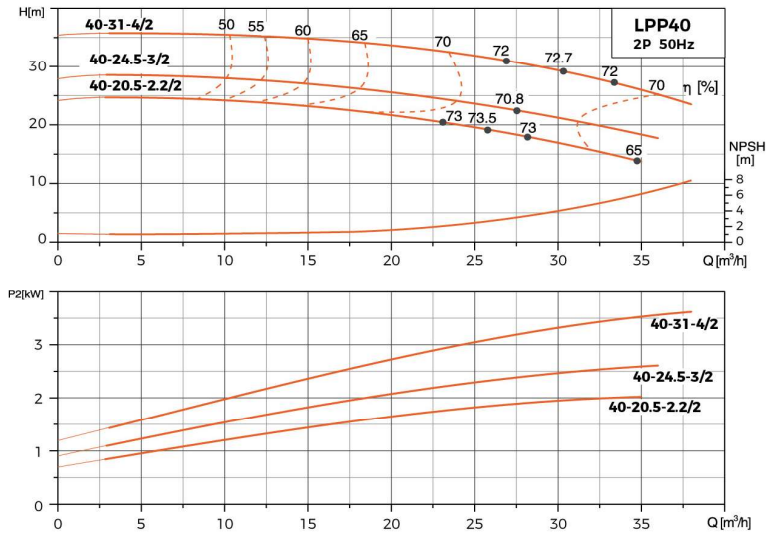


Dimension

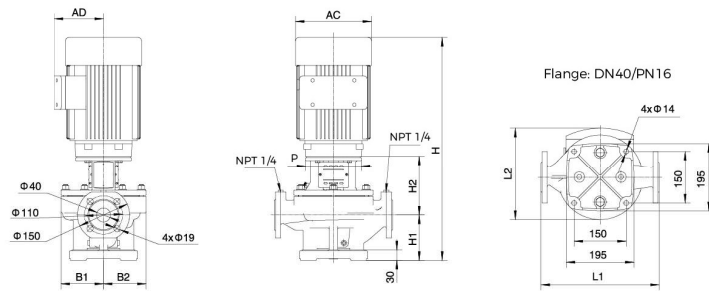


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP40-31-4/2	340	246	698	130	170	123	123	Φ160	143	210
LPP40-24.5-3/2	340	246	643	130	170	123	123	Φ160	120	186
LPP40-20.5-2.2/2	340	247.5	620	130	170	123	123	Φ140	128	164

Hydraulic Performance Curves

LPP50	Rated speed: 2900r/min	Max. working pressure: 16bar
--------------	-------------------------------	-------------------------------------

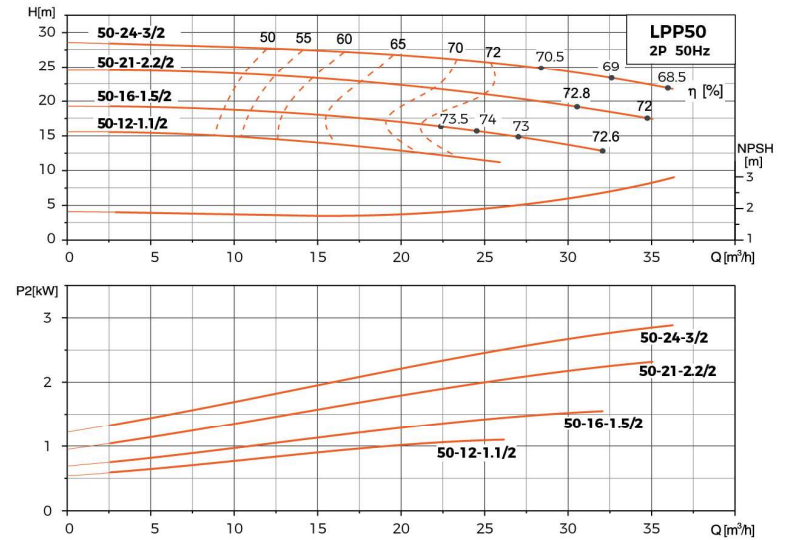

Dimension

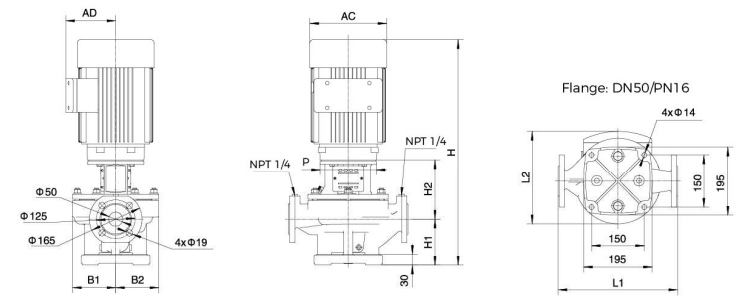

Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP50-24-3/2	340	246	666	145	178	123	123	Φ160	120	186
LPP50-21-2.2/2	340	250.5	643	145	178	123	123	Φ140	128	164
LPP50-16-1.5/2	340	250.5	643	145	178	123	123	Φ140	128	164
LPP50-12-1.1/2	340	247.5	594	145	178	123	123	Φ120	125	150