


TECHNICAL DATA MODEL - LB 8

Dimension, Weight & Performance Table

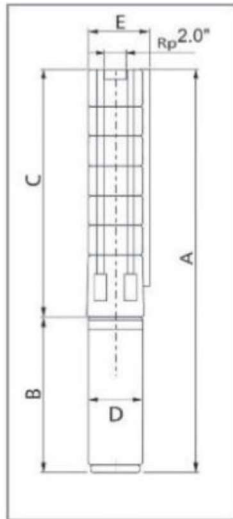

Model - Stage	n-2950 RPM	Discharges (Q)					Dimensions in (mm)				Pump
	m³ / hrs	4	6	8	9	10	Rp 2" Thread Connection				Net Weight In Kgs
	Ltr / Min.	66.8	100.2	133.6	150	167					
	Motor kw / HP	Total Head in Meters					C	A	D*	E**	
LB 8-5	0.75 / 1.0	25	23	21	19	16	425	777	95	101	5
LB 8-7	1.1 / 1.5	35	32	29	26	22	509	891	95	101	6
LB 8-10	1.5 / 2.0	50	46	41	37	32	635	1057	95	101	7
LB 8-12	2.2 / 3.0	61	57	51	46	39	719	1199	95	101	8
LB 8-15	2.2 / 3.0	76	70	62	56	47	845	1325	95	101	10
LB 8-18	3.0 / 4.0	91	84	75	67	57	971	1518	95	101	11
LB 8-21	4.0 / 5.5	107	99	89	80	68	1097	1720	95	101	12
LB 8-25	4.0 / 5.5	126	116	104	94	79	1265	1888	95	101	14
LB 8-30	5.5 / 7.5	151	138	123	110	92	1475	2212	95	101	16
LB 8-37	5.5 / 7.5	184	168	148	132	110	1769	2506	95	101	19
LB 8-44	7.5 / 10.0	221	200	178	158	132	2063	2877	95	101	22
LB 8-50	7.5 / 10.0	252	228	203	180	151	2315	3129	95	101	25
LB 8-58	9.3 / 12.5	292	264	235	209	175	2726	3470	142	142	28
LB 8-66	11.0 / 15.0	332	300	267	238	199	3062	3836	142	142	31
LB 8-73	11.0 / 15.0	367	332	296	263	220	3356	4130	142	142	35
LB 8-82	13.0 / 17.5	412	373	332	295	247	3734	4558	142	142	39
LB 8-91	15.0 / 20.0	458	414	369	328	274	4112	4981	142	142	43
LB 8-100	15.0 / 20.0	503	455	405	360	301	4490	5359	142	142	46
LB 8-110	18.5 / 25.0	554	501	446	396	331	4910	5824	142	142	51

* Motor type / size may change as per requirement.

** Maximum diameter of pump inclusive of cable guard.