



MD- 55.70.100.120

• حداکثر آبدهی : 40 - 135 L/min
• حداکثر ارتفاع : 5.6 - 14.3 m

55

MD - 55R



70

MD - 70R



100

MD - 100R



120

MD - 120R




SPC MD


مدل	ولتاژ	دهانه ورودی و خروجی		حداکثر ارتفاع (m)	ارتفاع (m)	آبدهی Lit/min	قدرت (W)
		سرشیلنگی (mm)	رزوه ای (Inch)				
MD 55 R	220	26	G 1"	5.6	5 - 4 - 2	20 - 32 - 48	265
MD 70 R			6.7	6 - 4 - 2	20 - 52 - 72		
MD 70 RZ		20	G 3/4"	14.3	13 - 9 - 2	25 - 33 - 37	
MD 100 R	220	26	G 1"	8.6	7.5 - 5 - 3	43 - 80 - 100	365
MD 120 R	380	40	G 1 1/2" DN 40	8.2	7 - 5 - 3	50 - 90 - 120	370

دمای مایعات قابل انتقال : 0-80°C
وسکوزیته : 30m Pa.s(at1 S.G)
دمای محیط : 0-40°C


ساختار

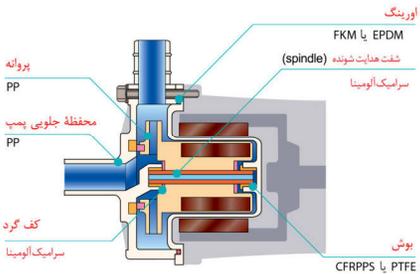


مدل پمپ




MD - 55R



MD - 70R (M)

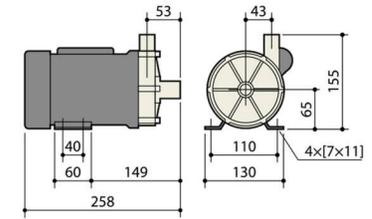

MD - 100R

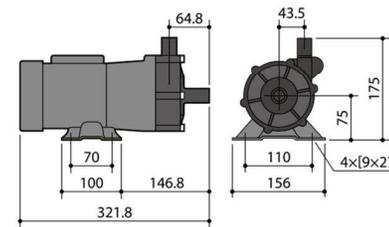

MD - 120

