


TECHNICAL DATA MODEL - LB 60

Dimension, Weight & Performance Table

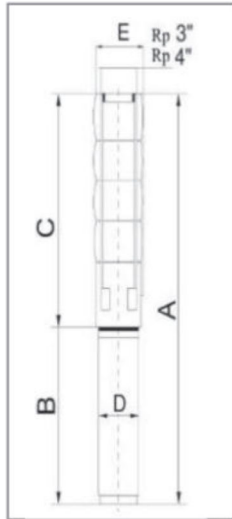

Model - Stage	n-2950 RPM	Discharges (Q)										Dimensions in (mm)				Pump
	m³ / hrs	0	10	20	30	40	50	60	70	78	Rp 4" Thread Connection				Net Weight In Kgs	
	Ltr / Min.	0	167	333	500	667	833	1000	1167	1300						
	Motor kw / HP	Total Head in Meters										C	A	D*	E**	
LB 60 - 2-B	3.0 / 4	22	22	21	18	15	13	10	6	1	483	977	95	145	8	
LB 60 - 2	4 / 5.5	28	27	26	23	19	17	14	10	5	483	1059	95	145	8	
LB 60 - 3	5.5 / 7.5	42	41	39	35	30	26	22	16	10	596	1271	95	145	10	
LB 60 - 4	7.5 / 10	56	55	52	47	41	35	30	22	14	709	1486	95	145	12	
LB 60 - 3	5.5 / 7.5	42	41	39	35	30	26	22	16	10	596	1139	145	152	13	
LB 60 - 4	7.5 / 10	56	55	52	47	41	35	30	22	14	709	1283	145	152	16	
LB 60 - 5	9.2 / 12.5	71	69	66	59	51	44	38	28	18	838	1442	145	152	18	
LB 60 - 6	11 / 15	85	83	79	71	62	54	45	34	22	951	1586	145	152	20	
LB 60 - 7	13 / 17.5	99	97	92	83	73	63	53	40	26	1064	1728	145	152	22	
LB 60 - 8-B	13 / 17.5	108	105	100	90	79	68	57	42	26	1177	1841	145	152	24	
LB 60 - 8	15 / 20	114	112	106	96	84	73	61	47	31	1177	1875	145	152	24	
LB 60 - 9-B	15 / 20	122	119	113	102	90	78	65	48	30	1290	1988	145	152	28	
LB 60 - 9	18.5 / 25	129	127	121	109	95	83	71	54	37	1290	2044	145	152	28	
LB 60 - 10	18.5 / 25	143	140	133	120	105	92	78	60	41	1403	2157	145	152	30	
LB 60 - 11	22 / 30	158	154	147	133	116	101	86	67	45	1516	2328	145	152	32	
LB 60 - 12	22 / 30	171	167	159	144	126	110	94	72	50	1629	2441	145	152	34	
LB 60 - 13	26 / 35	187	183	174	157	138	120	103	79	54	1742	2616	145	152	36	
LB 60 - 14	26 / 35	200	196	186	168	148	129	110	85	58	1855	2729	145	152	38	
LB 60 - 15	26 / 35	214	209	198	179	157	136	116	89	60	1968	2842	145	152	40	
LB 60 - 16	30 / 40	230	224	213	192	169	147	125	96	65	2081	3025	145	152	42	
LB 60 - 17	30 / 40	243	237	225	203	179	155	132	101	69	2194	3138	145	152	44	
LB 60 - 18	37 / 50	260	254	242	219	193	168	143	111	77	2387	3527	188	188	46	
LB 60 - 19	37 / 50	274	268	255	231	203	177	151	117	81	2500	3640	188	188	48	
LB 60 - 20	37 / 50	287	281	267	242	213	186	158	123	85	2613	3753	188	188	50	
LB 60 - 21	37 / 50	301	294	279	253	223	194	166	129	89	2726	3866	188	188	52	
LB 60 - 22	45 / 60	323	316	302	274	242	211	181	142	100	2788	4018	188	188	54	
LB 60 - 23	45 / 60	345	338	325	295	261	228	196	155	111	2850	4170	188	188	56	
LB 60 - 24	45 / 60	367	360	348	316	280	245	211	168	122	2912	4322	188	188	58	

* Motor type / size may change as per requirement.

** Maximum diameter of pump with two cable guard.